


### Foil-Faced Loaded Vinyl Barrier

**031348**

Foil-faced loaded vinyl barrier is designed to offer significant reduction of radiated noise. It combines a scrim-reinforced foil facing with a loaded vinyl barrier. The foil facing adds strength and a protective jacket.

**Applications include:**

- Noisy iron, steel, and plastic pipe
- Ducts
- HVAC units
- Machinery covers
- Valves

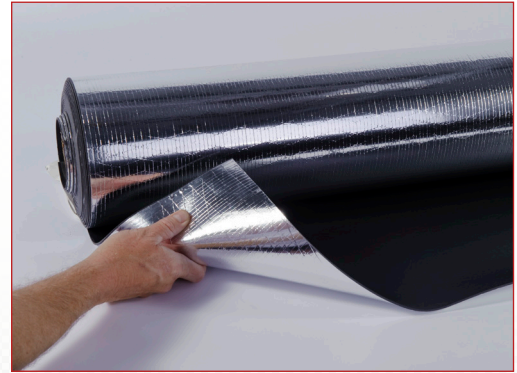

### Specifications and Physical Properties

**Typical Physical Properties:**

Width:	54 inch ± 1"
Length:	30 linear ft. rolls
Weight:	1 lb. per square foot
Service temperature:	-40° F to 180° F
Flammability:	Meets Class A per ASTM E-84-00

**Sound Transmission Loss (dB):**

Frequency in Hertz	125	250	500	1K	2K	4K	STC
031348	13	17	21	28	33	40	26
Per ASTM E-90-75, ASTM E413-75							

