


Foil-Faced Loaded Vinyl Barrier

031348

Foil-faced loaded vinyl barrier is designed to offer significant reduction of radiated noise. It combines a scrim-reinforced foil facing with a loaded vinyl barrier. The foil facing adds strength and a protective jacket.

Applications include:

- Noisy iron, steel, and plastic pipe
- Ducts
- HVAC units
- Machinery covers
- Valves

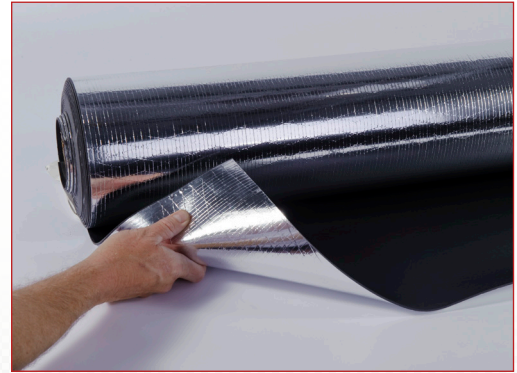

Specifications and Physical Properties

Typical Physical Properties:

Width:	54 inch ± 1"
Length:	30 linear ft. rolls
Weight:	1 lb. per square foot
Service temperature:	-40° F to 180° F
Flammability:	Meets Class A per ASTM E-84-00

Sound Transmission Loss (dB):

Frequency in Hertz	125	250	500	1K	2K	4K	STC
031348	13	17	21	28	33	40	26
Per ASTM E-90-75, ASTM E413-75							

