


Convuluted Foam

031127

Convuluted foam is a polyurethane foam with an open cell construction that provides a non-reflective surface which absorbs noise. The contoured surface presents a greater surface area than flat foams, enhancing the product's noise absorption capabilities.

Applications include:

- Enclosures
- Guards
- Cabinets

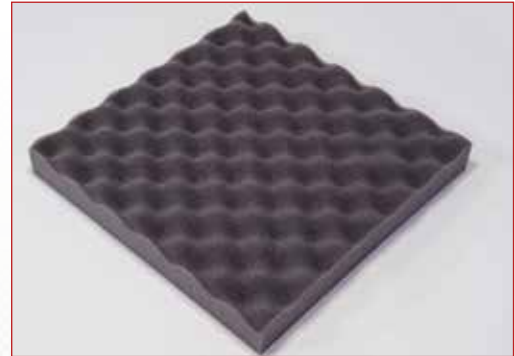

Specifications and Physical Properties

Typical Acoustical Foam Physical Properties:

Size:	2" over 1", 27" x 54"
Color:	Charcoal
Density:	2 lbs./cu.ft.
Flame resistance:	Meets UL94 classification HF-1

Typical Sound Absorption Coefficients:

Random absorption	125	250	500	1K	2K	4K
031127	.11	.33	.70	.93	.96	.94

Acoustical properties determined by ASTM C-384

The Federal Trade Commission considers that there are no existing test methods or standards regarding flammability that are accurate indicators of the performance of cellular plastic materials under actual fire conditions. Any results of existing test methods, such as ASTM D-1692 and UL94, are intended only as measurements of the performance of such materials under specific, controlled test conditions. The terminology associated with the tests or standards, such as "non-burning", "self-extinguishing" or "non-combustible", is not intended to reflect properties of such products under actual fire conditions.

